




Fischer-Robertson, Inc.
 3890 Symmes Road
 Hamilton, Ohio 45015
 p: 513-860-3445
 f: 513-860-4744
 sales@fischer-robertson.com
 www.fischer-robertson.com

TANK GAUGING
 TAPES
 BULLETIN 127
 (5-91)

HIGH PRESSURE MEMBRANE TESTER

PERFORMS FUEL TESTS TO ASTM D2676 AT PRESSURES UP TO 450 PSI

- STAINLESS STEEL HOUSING AND VALVE
- FLUSHING HOSE
- INCLUDES GROUNDING AND BONDING HOSE AND ASTM COLOR BOOK

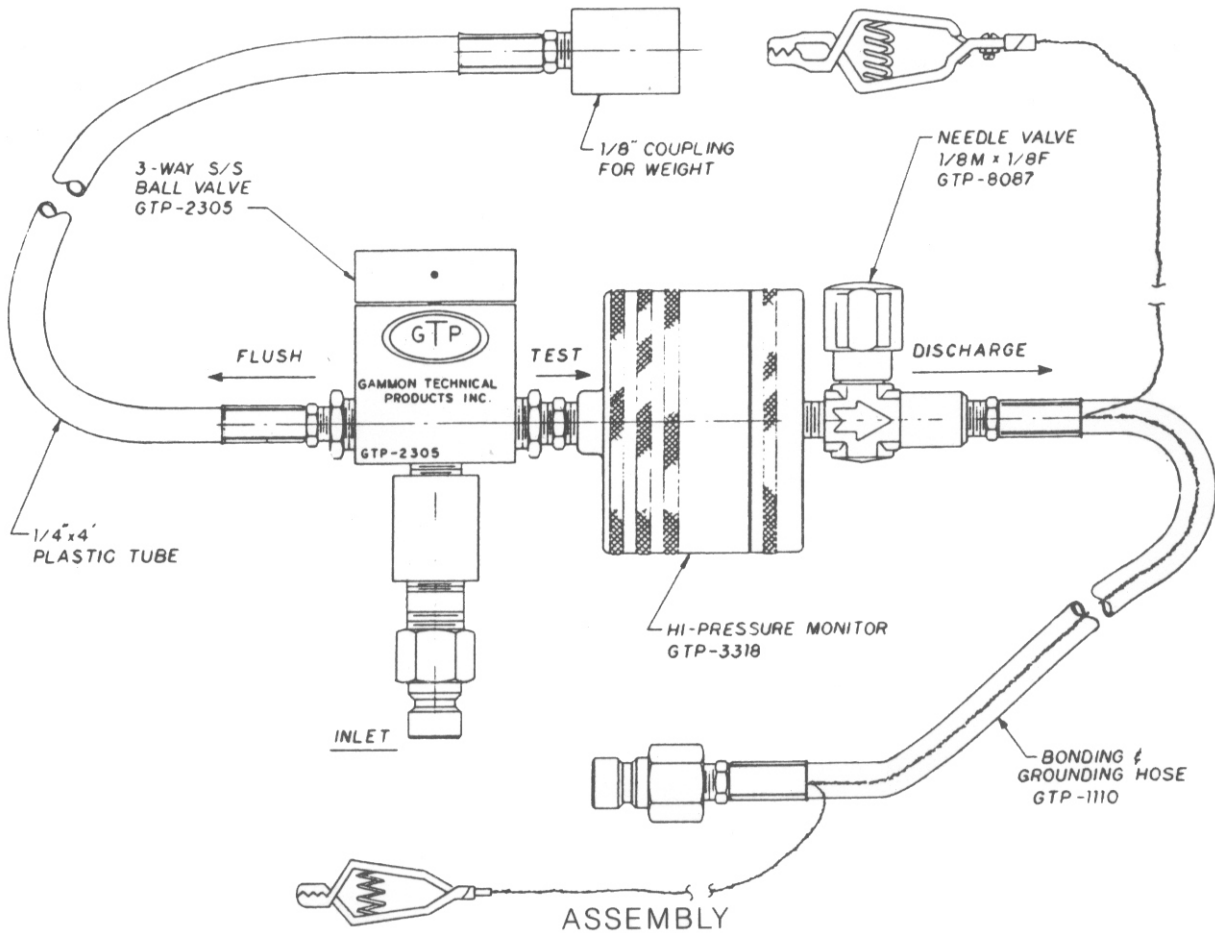

PART NUMBER GTP-3318-100

Jet fuel particulate contamination testing is performed to ASTM D2276 and IP-216. Conventional equipment on the market is not suitable for high pressures. This is because the plastic monitor is only rated for 100 psi. We have found a way to design a housing which allows testing using standard plastic monitors at up to 450 psi.

See Bulletin 73 for replacement membranes and backup pads. For testing at pressures below 100 psi, see Bulletin 8.